14F08-E Relay Socket

Product Picture

Specification

Rated load	Current		5A
	Voltage		300V
Dielectrics withstand voltage			2500V/S
Ambient temperature			-40℃ ～75℃
Material			Flame retardant –PA46-S250F6(V0)
Material of clip clutch			QSn6.5-0.1
Installation			Standard guide rail
Accessories			Clip
Module			LED module
Packing	Inner box	Paper box	20PCS
	Outer box	Carton	400PCS/CTN
	Dimension of the carton	400PCS/CTN	440mm*350mm*295mm
	Weight	1PCS	Approximate 45g
		400PCS/CTN	G.W:20Kg N.W:18Kg
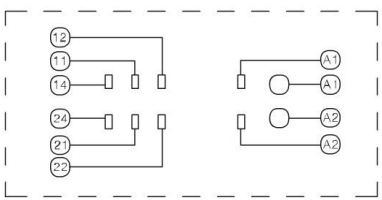
Wiring Diagram