


Model and Description

HHC70A(JQX-10F) - 1C - 12VDC

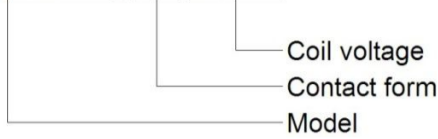


★Contact form: A=NO, B=NC, C=NO&NC

Specification

Dimension		35mm*35mm*55mm		
Contact Feature	Form	2A,2B,2C	3A,3B,3C	
	Rated load	10A		
	Max switching voltage	240VAC/28VDC		
	Contact resistance	≤100mΩ		
	Material	Silver Alloy		
	Electrical life	≥1*10 ⁵		
	Mechanical life	≥1*10 ⁷		
Operate voltage (23℃)		DC:≤75%*Rated voltage AC:≤80%*Rated voltage		
Release voltage (23℃)		DC:≥10%*Rated voltage AC:≥30%*Rated voltage		
Maximum voltage (23℃)		110%*Rated voltage		
Coil voltage	DC	DC6-220V(Customize allowed)		
	AC	AC6-380V(Customize allowed)		
Coil power	DC	1.8W		
	AC	2.7VA		
Pick-up time		≤20ms		
Release time		≤15ms		
Dielectric strength	Between Same-pole contacts	1000VAC/1min(leakage current 1mA)		
	Between Opposite-pole contacts	1500VAC/1min(leakage current 1mA)		
	Between contacts and coil	1500VAC/1min(leakage current 1mA)		
Insulation resistance		≥100mΩ(500VDC)		
Ambient temperature		-25℃ ~ 55℃		
Ambient humidity		45%-75%RH		
Atmospheric pressure		86-106KPa		
Shock resistance		10G (sinusoidal half-wave pulse: 11ms)		
Vibration resistance		10-55Hz (double amplitude: 1.5mm)		
Installation		Socket with DIN Rail		
Packing	Inner box	Paper box	10PCS	
		Foam box	20PCS	
	Outer box	Paper box	200PCS/CTN	
		Foam box	200PCS/CTN	
	Dimension of the carton	Paper box	395mm*198mm*318mm	
		Foam box	375mm*240mm*480mm	
	Weight	1PCS	Approximate 75g	
		Paper box	G.W:16Kg N.W:15Kg	
Foam box		G.W:16Kg N.W:15Kg		

Wiring Diagram & Bottom View

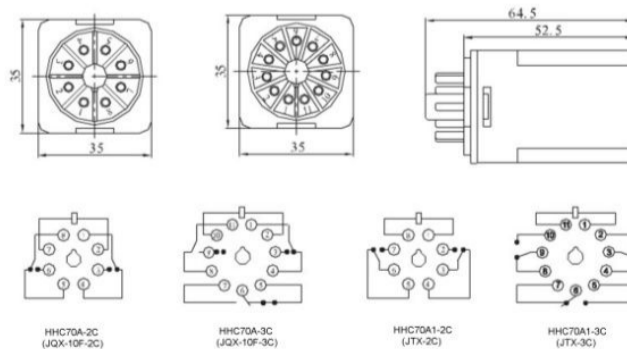

Performance Graph

