

Description


HHS6A-4




Specification

| | |
|---------------------------|---|
| Model | HH6A-4 |
| Rated Supply Voltage | AC24V, 36V, 110V, 220V, 380V 50Hz, DC48V(Operating voltage fluctuation range: 85% to 110% Ue) |
| Operating mode | Power on delay descending type |
| Time range | 99.9s, 999s, 99.9m, 999m, 99.9h, 999h |
| Repetitive error | The range of time delay > 1s, Er ≤ 1%, the range of time delay < 1s, Dr ≤ 50ms. |
| Rated Load of the Contact | 3A AC220V(Resistive) |
| Electrical Life | 100000 operations min. (3 A at 250VAC/30VDC, resistive load) |
| Installation | Flush mounting |


Wiring Diagram



Operation time sequence

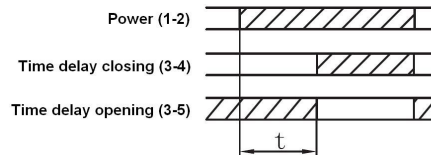


Dimension(mm) and Installation(mm)

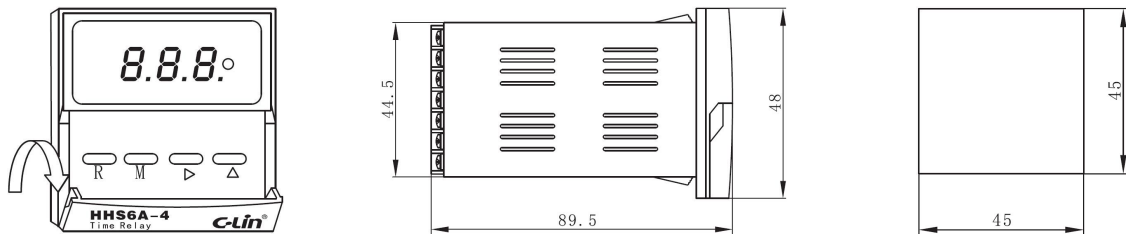


Application


Samples01



Samples02



Samples03



Samples04

