

Description

HHS3S




Specification


| Model | HHS3S-2D | HHS3S-3D | HHS3S-3SM |
|---------------------------|---|---|---|
| Rated Supply Voltage | AC24V, 36V, 110V, 220V, 380V 50Hz, DC24V(Operating voltage fluctuation range: 85% to 110% Ue) | | |
| Operating mode | Power on delay | | |
| Time range | 0.1s~9.9s 1s~99s 1m~99m | 0.1m~9.9m 0.1s~99.9s 1s~999s 1m~999m | 0.1s~99.9s 1s~999s 0.1m~99.9m 1m~999m |
| Repetitive error | The range of time delay > 1s, Er ≤ 1%, the range of time delay < 1s, Er ≤ 50ms. | | |
| Contact | 2C time delay | | A mode: 2C time delay B mode: 1C time delay and 1C instantaneous |
| Rated Load of the Contact | 3A AC220V(Resistive) | | |
| Electrical Life | 100000 operations min. (3 A at 250 VAC/30 VDC, resistive load) | | |
| Installation | Flush mounting | | |

Wiring Diagram

HHS3S-2D, HHS3S-3D




HHS3S-3SM




Operation time sequence

HHS3S-2D, HHS3S-3D, HHS3S-3SM A model

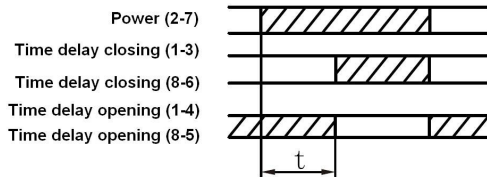


HHS3S-3SM B model

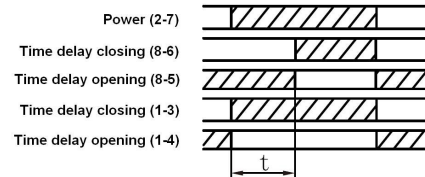


Dimension(mm) and Installation(mm)

HHS3S-CD, HHS3S-3D

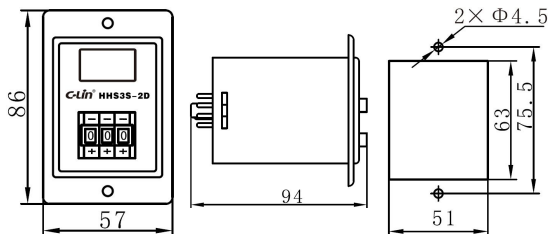


HHS3S-3SM

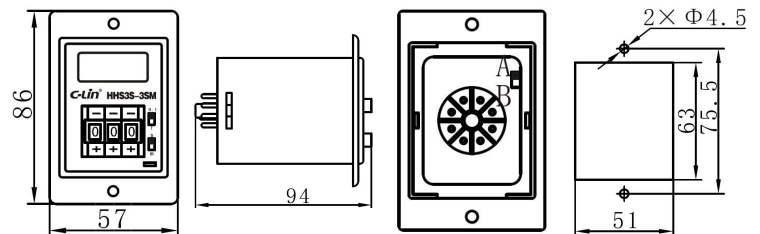


Application


Samples01



Samples02



Samples03



Samples04

