

**Description**

HHS17P



HHS17PR




**Specification**


Model	HHS17P	HHS17PC	HHS17PG	HHS17PR
Rated Supply Voltage	AC24V, 36V, 110V, 220V, 380V 50Hz, DC24V (Operating voltage fluctuation range: 85% to 110% Ue)			
Operating mode	Power on delay	Power on delay with instantaneous	Release delay	Circulation delay
Set	2 digits with benchmark time / 3 digits with dial switch			
Time range	0.1s~99h, 0.1s~99.9s, 1s~999s, 0.1m~99.9m, 1m~999m, 0.1h~99.9h, 1h~999h			
Repetitive error	The range of time delay > 1s, Er ≤ 1%, the range of time delay < 1s, Dr ≤ 50ms.			
Contact	2C time delay	1C time delay and 1C instantaneous	2C time delay	
Rated Load of the Contact	3A AC220V(Resistive)			
Electrical Life	100000 operations min. (3 A at 250 VAC/30 VDC, resistive load)			
Installation	Flush mounting and 35mm DIN rail mounting			

**Wiring Diagram**


HHS17P




HHS17PC



HHS17PG




HHS17PR




**Operation time sequence**


HHS17P

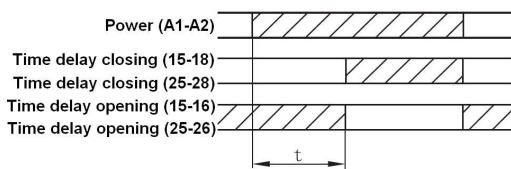


HHS17PC

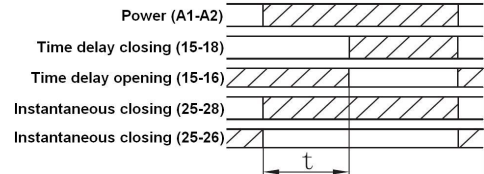

HHS17PG



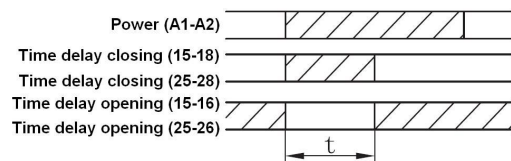


HHS17PR

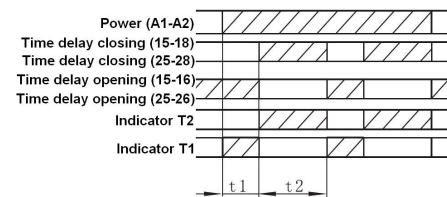


**Dimension(mm) and Installation(mm)**

HHS17P, HHS17PC, HHS17PG HHS17PR




**Application**


Samples01



Samples02



Samples03



Samples04

