


Description



Specification

Model	HHKG-2	HHKD-2
Power supply	AC220V ± 15%, 50Hz, ≈ 3VA	
Voltage setting range	0~200V	
Output pulse	Amplitude ≥ 3V, Width ≥ 50us (20 Ω load)	
Max. operating angle phase-shifted trigger	≥ 150°	
Ambient conditions	0°C ~ +50°C, ≤ 85%RH (with no icing and frosting)	
Dimension (mm)	48 × 48 × 74	72 × 72 × 65
Mounting (mm)	45 × 45	68 × 68
Installation	Flush mounting	

Dimension and Mounting (mm)

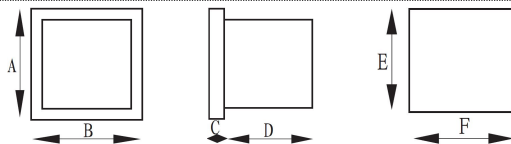

	A	B	C	D	E	F
HHKG-2	48	48	3	79	45 ^{+0.5}	45 ^{+0.5}
HHKD-2	72	72	9	75	68 ^{+0.5}	68 ^{+0.5}

Wiring

