


Description

CMT □ - □ □ □ □



CMT1-5000

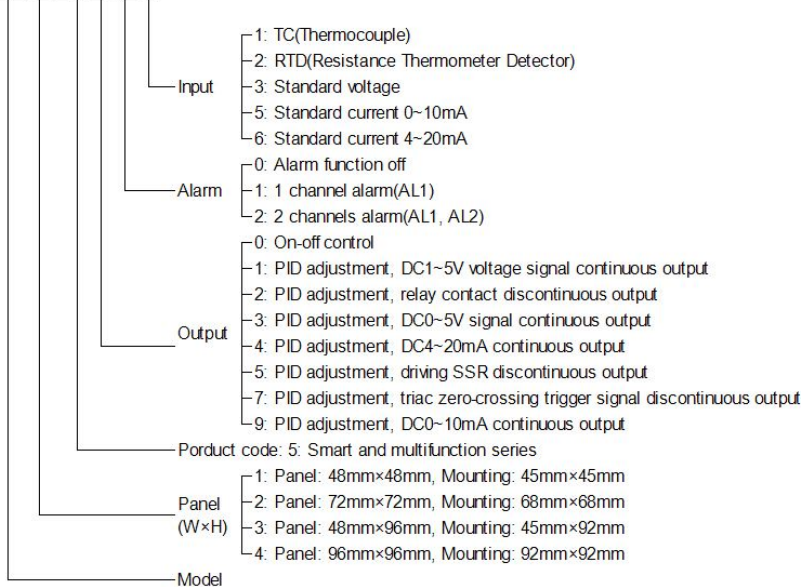

CMT2-5000



CMT3-5000




CMT4-5000




Specification

| Model | CMT1-5000 | CMT2-5000 | CMT3-5000 | CMT4-5000 |
|--|--|-----------|-----------|-----------|
| Power supply | AC220V, 50Hz, ≤2W | | | |
| Display | 3 digits LED digital tube | | | |
| Sensor type | NTC thermistor with 3m length 2 wires cable, use 2 sensor for each measuring point | | | |
| Max. External wire of the sensor | ≤100m | | | |
| Temperature measurement range | -20℃~+140℃, measurement accuracy: ≤1℃ | | | |
| Temperature difference measurement range | -99℃~+120℃ | | | |
| Temperature difference control range | 0℃~+60℃, the accuracy of setting: 1℃ | | | |
| Relay output | 1NO+1NC, 6A AC220V(Resistive load) | | | |
| Memory protection | The controller keep the set value same when power off. | | | |
| Ambient conditions | -20℃~+50℃, 10%~95%RH(with no icing and frosting) | | | |
| Dimension(mm) | 48×48×85 | 72×72×87 | 48×96×85 | 96×96×87 |
| Mounting(mm) | 45×45 | 68×68 | 45×92 | 92×92 |
| Installation | Flush mounting | | | |


Accessories with the package




Temperature sensor



Adapter for fixture






Specification



Waterproof pipe

Dimension and Mounting(mm)



Function

