


Description




Specification

Rated Supply Voltage	AC24V, 36V, 110V, 220V, 380V 50/60Hz, DC24V(85% to 110% of rated supply voltage)
Counting Speed	30 times/s
Counting range	1~9999($\times 1$, $\times 10$, $\times 100$ times dial switch)
Input Signals	Contact and Limit switch
Output Modes	N, C
Reset	Button switch and connect terminal 1 and 4
Memory Protection	No(Can be customize)
Mechanical Life	1000000 operations min.
Electrical Life	100000 operations min. (5 A at 250 VAC/30 VDC, resistive load)
Rated Load of the Contact	5A AC220V(Resistive)
Installation	Flush mounting and 35mm DIN rail



Wiring Diagram and Dimension(mm)



Input Signals



Input/Output Mode Settings

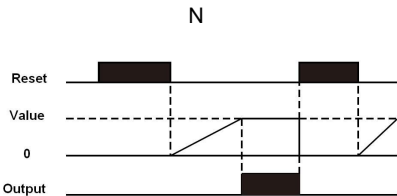

Dimension(mm) and Mounting(45mm*45mm)

