

## Description




## Specification


Rated Supply Voltage	AC24V, 36V, 110V, 220V 50/60Hz, DC6V, 12V, 24V(85% to 110% of rated supply voltage)
Input Modes	Increment
Counting Speed	High frequency 1000 times/s, Low frequency 30 times/s
Counting range	1~999999
Input Signals	Contact signal: Relay, Limit switch and so on Sensor signal: Proximity switch, Photoelectric switch, Hall switch
Reset	Button switch
Memory Protection	10 years
Display	6 digital LED display
Dimension	40mm×56mm×88mm
Mounting	26mm×51mm
Installation	Flush mounting

## Wiring Diagram

Contact signal

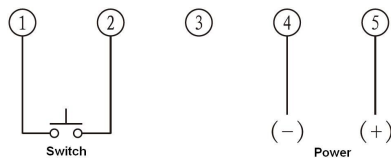

Sensor signal

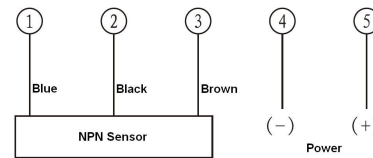

## Dimension(mm) and Mounting(mm)

