


Model and Description

HHC66F(JZC-22F) - 10A - 1C - 12VDC

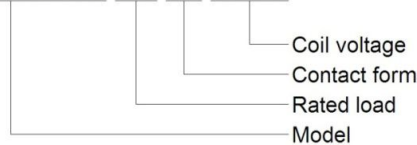


★Contact form: A=NO, B=NC, C=NO&NC

Specification

Dimension	20.3mm*16.6mm*20.4mm		
Contact	Form	1A,1B,1C	
	Rated load	10A	15A
	Max switching voltage	240VAC/28VDC	NO: 125V
	Contact resistance	≤100mΩ	
	Material	Silver Alloy	
	Electrical life	≥1*10 ⁵	
	Mechanical life	≥1*10 ⁷	
Operate voltage (23℃)	DC:≤75%*Rated voltage /		
Release voltage (23℃)	DC:≥10%*Rated voltage /		
Maximum voltage (23℃)	110%*Rated voltage		
Coil voltage	DC	DC3-48V(Customize allowed)	
	AC	/	
Coil Power	DC	0.36W	
	AC	/	
Pick-up time	≤10ms		
Release time	≤5ms		
Dielectric strength	Between Same-pole contacts	1200VAC/1min (leakage current 1mA)	
	Between Opposite-pole contacts	/	
	Between contacts and coil	1500VAC/1min(leakage current 1mA)	
Insulation resistance	≥100mΩ(500VDC)		
Ambient temperature	-55℃ ~70℃		
Ambient humidity	35%-80%RH		
Atmospheric pressure	86-106KPa		
Shock resistance	10G (sinusoidal half-wave pulse: 11ms)		
Vibration resistance	10-55Hz (double amplitude: 1.5mm)		
Installation	PCB		
Packing	Inner box	Paper box	100PCS
	Outer box	Paper box	1200PCS/CTN
	Dimension of the carton	1200PCS/CTN	390mm*230mm*195mm
	Weight	1PCS 1200PCS/CTN	Approximate 12g G.W:15.5Kg N.W:14.5Kg

Wiring Diagram & Bottom View

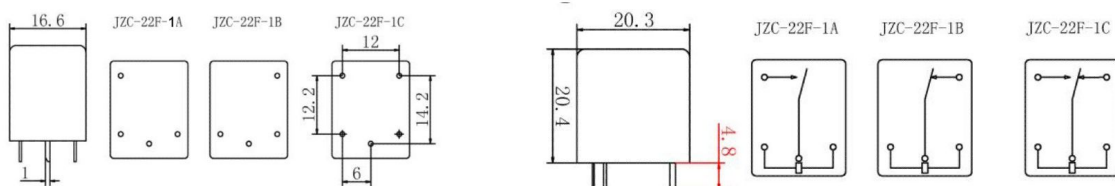

Performance Graph

